




36-inch Wide Counter Depth French Door Refrigerator - 20 cu. ft.

WRF540CWHZ

Available Finishes/Colours

| | |
|---|---|
|  | WRF540CWHZ FingerPrint Resistant Stainless Steel |
|---|---|

| Dimensions | |
|------------|--------|
| Depth | 29 3/8 |
| Height | 70 1/8 |
| Width | 35 5/8 |

| Details | |
|---------------|-------------------|
| Cooling Type | Single Evaporator |
| Counter Depth | Yes |

| Configuration and Overview | |
|----------------------------|--|
| Advance Foam Insulation | 99.9% lower Global Warming Potential and Better Energy Performance |
| Counter Depth | Yes |
| Number of Doors | 3 |

| Controls | |
|----------------------------|-------------------|
| Control Type | Electronic |
| Air Filter Indicator/Reset | No |
| Automatic Defrost | Yes |
| Verrouillage des commandes | No |
| LCD Touch Screen | No |
| Door Ajar/Open Alarm | Yes |
| Control Location | Interior Up Front |
| Max Cool/Fast Cool | Yes |

Add up to 6 inches of additional kitchen space with this counter depth refrigerator. This refrigerator with water dispenser gives you the storage you need with features like the crisper drawer to store fruits and veggies at the ideal temperature. An interior water dispenser with an EveryDrop™ water filter gives you easy access to filtered water whenever you want it.

| Top Features |
|------------------------|
| Fingerprint Resistant |
| ENERGY STAR® Certified |
| Counter Depth Design |

| Compatibility | |
|---------------|----|
| Connectivity | No |
| Works With | No |

| Details | |
|-------------------------|--|
| Advance Foam Insulation | 99.9% lower Global Warming Potential and Better Energy Performance |

Manuals & Literature:



-  [Dimension Guide](#)
-  [Energy Guide](#)
-  [Use and Care Guide](#)
-  [Warranty Information](#)



French Door Bottom Mount Refrigerator

WRF532SMH, WRF540CWH, WRF535SMH

PRODUCT DIMENSIONS

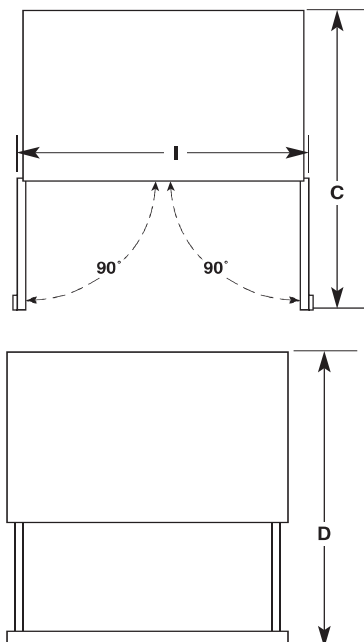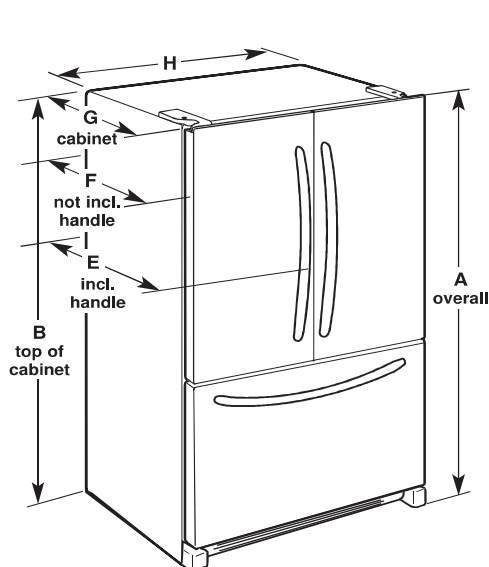

| Model Number | WRF532SMH | WRF535SMH | WRF540CWH |
|-----------------------------|--|--|--|
| Model Size | 22.1 cu. ft. | 25.2 cu. ft. | 20.0 cu. ft. |
| Height - Overall "A" | 70 ¹ / ₈ " (178.1 cm) | 70 ¹ / ₈ " (178.1 cm) | 70 ¹ / ₈ " (178.1 cm) |
| Height - Top of Cabinet "B" | 68 ⁷ / ₈ " (174.9 cm) | 68 ⁷ / ₈ " (174.9 cm) | 68 ⁷ / ₈ " (174.9 cm) |
| Depth - Doors Open 90° "C" | 47 ¹ / ₈ " (119.7 cm) | 48 ¹ / ₈ " (122.2 cm) | 43" (109.2 cm) |
| Depth - Drawer Open "D" | 52 ¹ / ₈ " (132.4 cm) | 52 ¹ / ₈ " (132.4 cm) | 45 ³ / ₈ " (115.3 cm) |
| Depth - With Handles "E" | 34 ¹ / ₂ " (87.4 cm) | 35 ¹ / ₂ " (89.9 cm) | 30 ¹ / ₂ " (77.5 cm) |
| Depth - Without Handles "F" | 32" (81.3 cm) | 33" (83.8 cm) | 26 ⁷ / ₈ " (68.3 cm) |
| Depth - Cabinet Only "G" | 28 ¹ / ₈ " (71.3 cm) | 29 ¹ / ₈ " (73.9 cm) | 24 ¹ / ₈ " (61.2 cm) |
| Width - Cabinet "H" | 32 ⁵ / ₈ " (82.9 cm) | 35 ⁵ / ₈ " (90.5 cm) | 35 ⁵ / ₈ " (90.5 cm) |
| Width - Door Open 90° "I" | 40 ³ / ₈ " (102.6 cm) | 43 ³ / ₈ " (110.2 cm) | 43 ³ / ₈ " (110.2 cm) |

⚠ WARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

Electrical: A 115 V, 60 Hz, AC only 15 A or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 35 psi and 120 psi (241 kPa and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 psi and 120 psi (241 kPa and 827 kPa).


Reverse Osmosis Water Supply:

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 psi to 60 psi (276 kPa to 414 kPa).

LOCATION REQUIREMENTS

⚠ WARNING

Explosion Hazard
Keep flammable materials and vapors, such as gasoline, away from refrigerator.
Failure to do so can result in death, explosion, or fire.

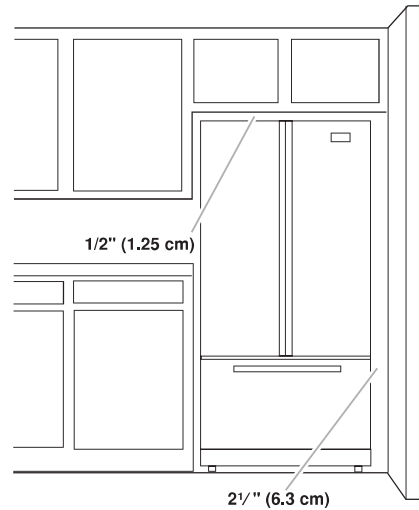

IMPORTANT: This refrigerator is designed only for indoor, household use only.

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2 1/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.



4.8 Cu. Ft. Whirlpool® Electric Range with Frozen Bake™ Technology

YWEE515S0LS

Available Finishes/Colours

| | | | |
|---|--------------------------------|---|--------------------------------|
|  | YWEE515S0LB Black |  | YWEE515S0LS Stainless Steel |
|  | YWEE515S0LV Black Stainless |  | YWEE515S0LW White |

| Dimensions | | Features | |
|------------------------------------|----------------------|-----------------------------------|-----------------|
| Depth | 28 15/16 | Automatic Convection | No |
| Width | 29 7/8 | Conversion Temperature Adjust | |
| Configuration and Overview | | Griddle | NA |
| Range Type | Freestanding | Power Outage Compatible | No |
| Exterior | | Cooktop Details | |
| Door Removable | Yes | Cooktop Element Style | Radiant |
| Drawer Type | Storage Drawer | Cooktop Surface Color | Black |
| Door Type | Glass | Number of Cooking Element-Burners | 4 |
| Oven Window Size | Large | Cooktop Control Knob Color | Stainless Steel |
| Handle Color | Stainless Steel | Right Rear Element-Burner Size | 6" |
| Handle Material | Metal | Left Rear Element-Burner Size | 6" |
| Handle Type | Reach-Through Handle | | |
| Features | | | |
| Hot Surface Indicator Light | Yes | | |
| Heating Element On Indicator Light | Yes | | |

Simplify steps in the cooking process with an electric slide in range that lets you skip preheating for frozen favorites with Frozen Bake™ Technology. Get more flexibility and fast boil times on the cooktop with high wattage FlexHeat™ Dual Radiant Elements. This range is also equipped with a high-temperature, adjustable self clean oven cycle so you can clean without using chemicals.

- Top Features
- Frozen Bake™ technology
- Two FlexHeat™ Dual Radiant Elements
- Adjustable Self-Clean Cycle

- Manuals & Literature:
-  [Dimension Guide](#)
-  [Use and Care Guide](#)
-  [Warranty Information](#)



Front Control Electric Ranges

PRODUCT MODEL NUMBERS

WEC310S0L WEE515S0L WEE515SAL YWEE515S0L

ELECTRICAL CONNECTION

To properly install your range, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

Range must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. The model/serial/rating plate is located behind the oven door on the top right-hand side of the oven frame.

This range is manufactured with the neutral terminal connected to the cabinet. Use a 3-wire, UL listed, 40- or 50-amp power supply cord (pigtail). See the following Range Rating chart. If local codes do not permit ground through the neutral, use a 4-wire power supply cord rated at 250 volts, 40- or 50-amps and investigated for use with ranges.

| Range Rating* | | Specified Rating of Power Supply Cord Kit and Circuit Protection |
|----------------|----------------|--|
| 120/240 Volts | 120/208 Volts | Amps |
| 8.8 - 16.5 KW | 7.8 - 12.5 KW | 40 or 50** |
| 16.6 - 22.5 KW | 12.6 - 18.5 KW | 50 |


* The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

** If connecting to a 50-amp circuit, use a 50-amp rated cord with kit. For 50-amp rated cord kits, use kits that specify use with a nominal 1^{3/8}" (3.5 cm) diameter connection opening.

A circuit breaker is recommended.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

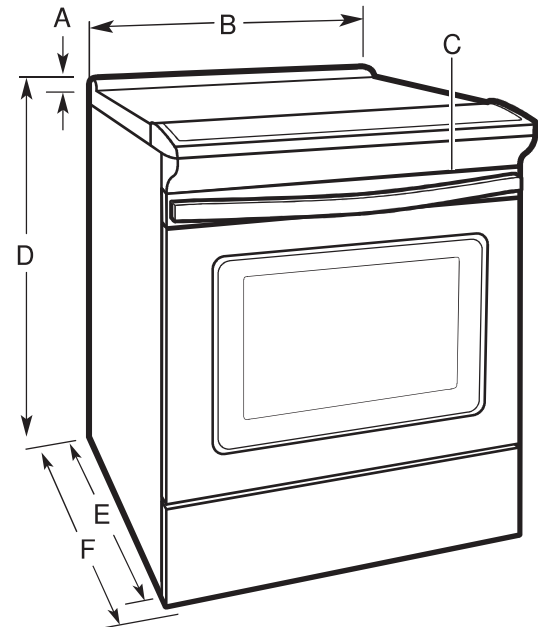

A. 1^{3/8}" (3.0 cm) height from cooktop to top of vent

B. 29^{7/8}" (75.9 cm)

C. Model/serial/rating plate (located behind the oven door on the top right-hand side of the oven frame)

D. WEE515SAL: 34" (86.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*
Other models: 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*

E. 28^{25/64}" (72.1 cm) max. depth from front of console to back of range

F. 29^{1/64}" (73.7 cm) max. depth from handle to back of range

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section of the Owner's Manual. Using the cooktop as a reference for leveling the range is not recommended.


* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

CABINET DIMENSIONS

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Range may be installed next to combustible walls with zero clearance.

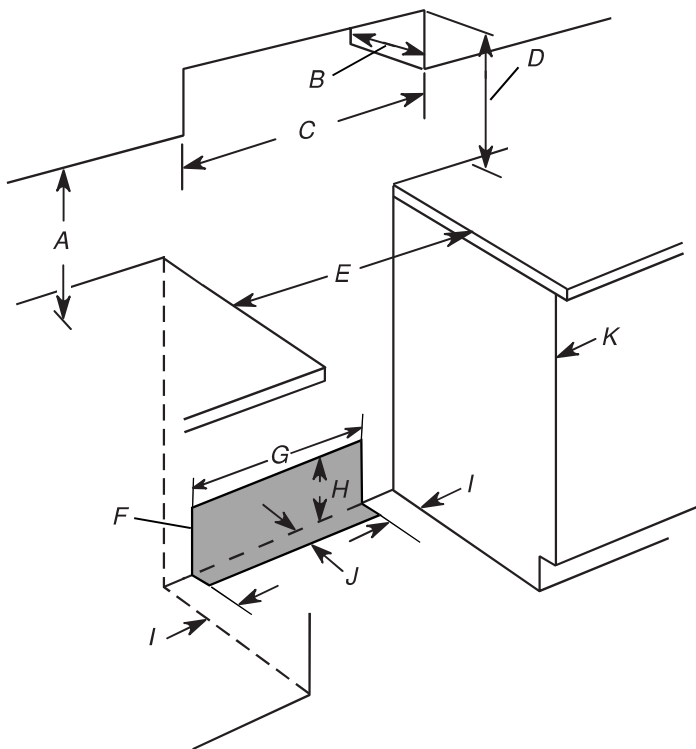

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*.
- E. 30" (76.2 cm) min. opening width
- F. The shaded area is recommended for installation of grounded outlet.
- G. 13¹/₈" (33.3 cm)
- H. 7¹/₁₆" (19.5 cm)
- I. 4¹³/₁₆" (12.2 cm)
- J. 3¹¹/₁₆" (9.4 cm)
- K. Cabinet door or hinges should not extend into the cutout.




* **NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is shielded by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. 30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.



Large Capacity Dishwasher with 3rd Rack

WDTA50SAKZ

Available Finishes/Colours

-  WDTA50SAKB
Black
-  WDTA50SAKW
White
-  WDTA50SAKT
Biscuit

-  WDTA50SAKV
FingerPrint Resistant Black Stainless Steel
-  WDTA50SAKZ
FingerPrint Resistant Stainless Steel

Load more, run less in this dishwasher with 3rd rack. Load hard-to-fit utensils or measuring spoons in the 3rd rack to free up more space for dishes below. You can even fit taller items where you want thanks to the adjustable rack. Plus, you can move or separate the flexible 3-piece silverware basket to make extra space.

Top Features

3rd rack

Adjustable 2nd rack

3-piece silverware basket

Manuals & Literature:



[Dimension Guide](#)



[Energy Guide](#)



[Use and Care Guide](#)



[Warranty Information](#)

Dimensions

| | |
|--------|--------|
| Width | 23 7/8 |
| Height | 34 5/8 |

Controls

| | |
|--------------------------------|-------------------------------|
| Automatic Temperature Controls | Yes |
| Control Location | Hidden |
| Control Type | Electronic Touch with Display |
| Sensor | Yes |
| Status Light | White |
| End of Cycle Signal | Yes |

Features

| | |
|-------------------------------------|-------------------------|
| Rinse Aid Dispenser Level Indicator | Yes |
| Dispensers | Detergent and Rinse Aid |
| Sound Package | Yes |

Features

| | |
|-----------------------|---|
| Number of Wash Levels | 5 |
|-----------------------|---|

Exterior

| | |
|-----------------------|-------------|
| Control Panel Color | Black |
| Handle Color | Grey |
| Handle Material | Plastic |
| Handle Type | Long Pocket |
| True Hold Door | Yes |
| Fingerprint Resistant | Yes |
| Magnetic Door | Yes |
| Toe Panel Color | Black |

Cycles

| | |
|-----------------------|---|
| Number of Wash Cycles | 5 |
|-----------------------|---|

Details

| | |
|---------------|-----------------|
| Door Style | Flat |
| Rack Material | Nylon |
| Tub Material | Stainless Steel |




24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

Applies to all model numbers starting with;
WDTA50SAK, WDT750SAKW0, WDTA80SAKZ0

PRODUCT DIMENSIONS

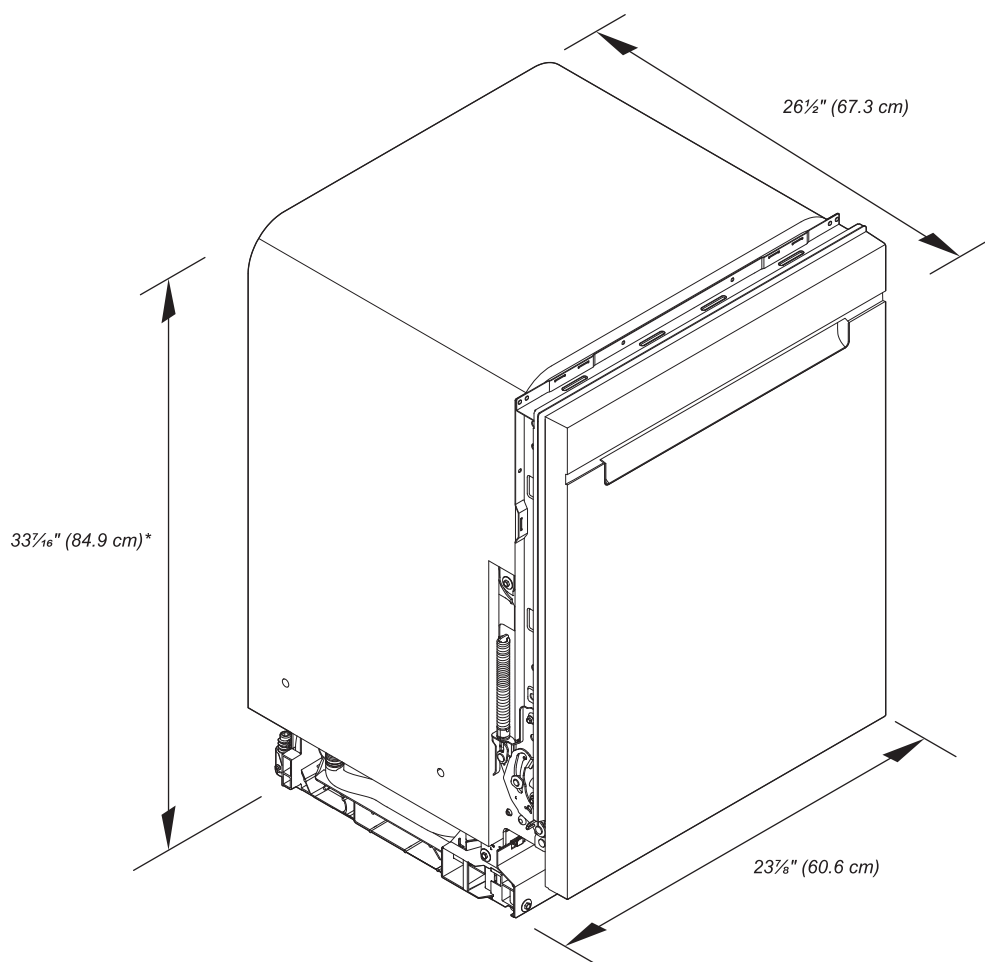

*Dishwasher can be raised $1\frac{7}{16}$ " (3.7 cm) with feet fully extended.


Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® 24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

PRODUCT DIMENSIONS (CONTD.)

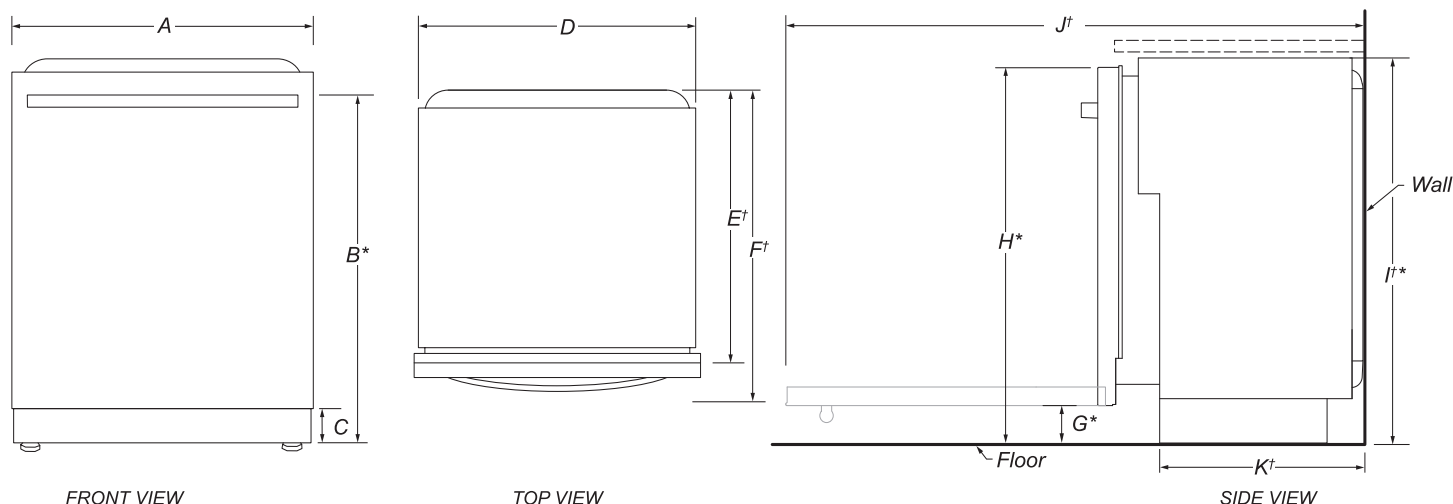

| | DESCRIPTION | DIMENSIONS |
|------------|--------------------------------------|---|
| A | Width of door | 23 ⁷ / ₈ " (60.6 cm) |
| B* | Height to top of handle | 31 ⁹ / ₁₆ " (80.1 cm) |
| C | Height of adjustable toe kick | 3 ¹ / ₂ " (8.8 cm) - min. 4 ¹ / ₄ " (10.8 cm) - max. |
| D | Width of recessed dishwasher | 23 ⁷ / ₈ " (60.6 cm) |
| E† | Depth without door | 22 ⁵ / ₈ " (57.5 cm) |
| F† | Depth with Towel Bar Handle | 26 ¹ / ₂ " (67.3 cm) |
| | Depth with Pocket Handle | 24 ¹ / ₂ " (62.2 cm) |
| G* | Height to bottom of door (min.) | 3 ⁵ / ₁₆ " (8.4 cm) |
| H* | Height to top of door (min.) | 33 ⁷ / ₁₆ " (84.9 cm) |
| I†* | Height of recessed dishwasher (min.) | 33 ⁵ / ₈ " (85.4 cm) |
| J† | Depth with door fully open (min.) | 50 ³ / ₁₆ " (127.4 cm) |
| K† | Depth with toe kick (min.) | 20 ¹³ / ₁₆ " (52.9 cm) |

†Insulation blanket thickness adds up to 11/16" (1.8 cm) but can crush up to 1/8" (0.3 cm).


*Dishwasher can be raised 1⁷/₁₆" (3.7 cm) with feet fully extended.

Whirlpool® 24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

OPENING/CLEARANCE DIMENSIONS

IMPORTANT: Check that all surfaces have no protrusions that would prohibit dishwasher installation.

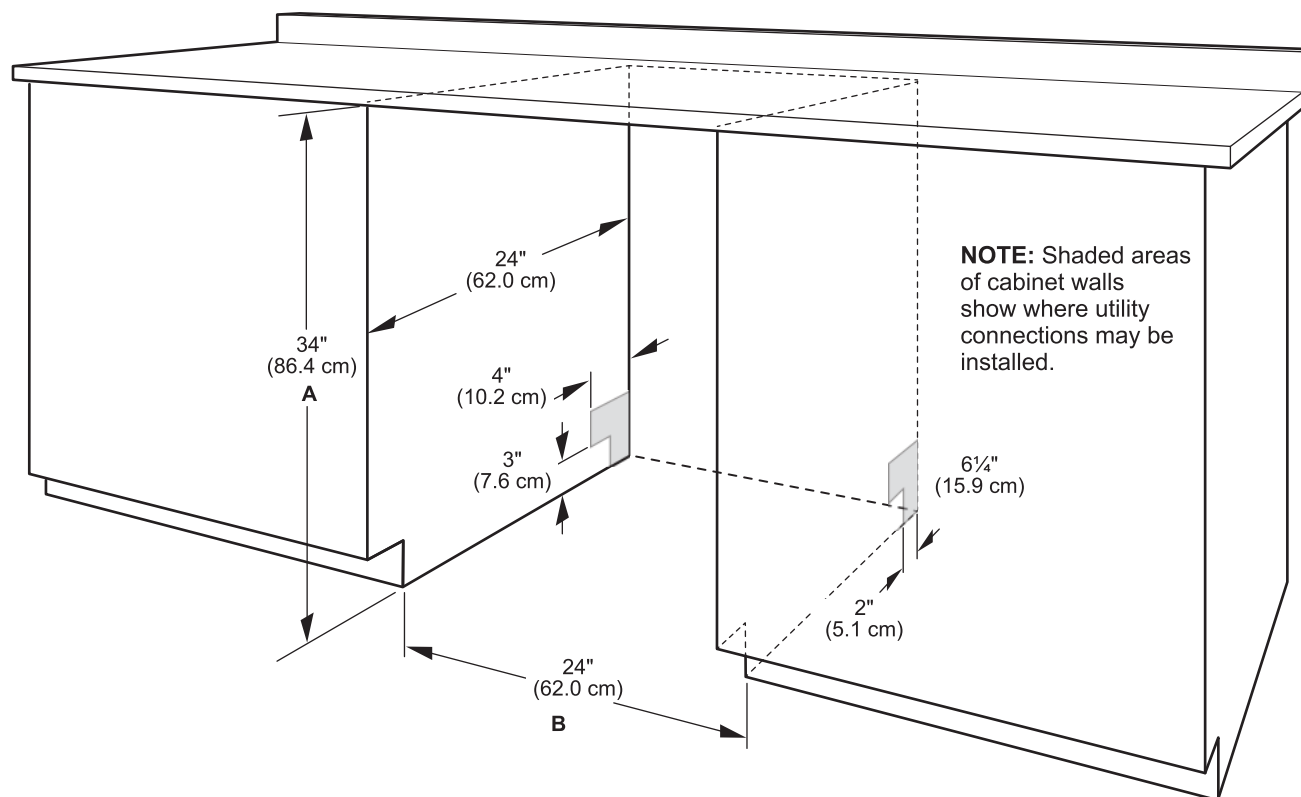

A. Measured from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.

B. Minimum, measured from narrowest point of opening.

NOTE: Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

1.1 cu. ft. Low Profile Microwave Hood Combination

YWML55011HS

Available Finishes/Colours



YWML55011HB
Black



YWML55011HS
Stainless Steel



YWML55011HW
White



| Dimensions | | Microwave Details | |
|-------------------------------|---------------------|------------------------|-------------------------------|
| Depth | 18 | Grill | No |
| Height | 10 5/16 | Number of Racks | 0 |
| Width | 29 7/8 | | |
| Microwave Details | | Exterior | |
| Interior Depth | 15 | Cabinet Color | Stainless |
| Microwave Type | Over-the-Range | Door Release | Touch to Open |
| Interior Height | 7 | Door Opening | Left |
| Interior Width | 19 | | |
| Interior Light | Halogen | Compatibility | |
| Work Surface Light | Halogen | Works With | No |
| Sensor Cooking | No | Ventilation System | |
| Cooking Power (watts) | 900 | Blower Type | Centrifugal |
| Cavity Finish | Powder Coat | Filters | Charcoal Odor Removing Filter |
| Turntable | Stoppable, Recessed | Duct Direction | Vertical or Horizontal |
| Turntable Diameter Size (in.) | 12 | Duct Outlet Size (in.) | 3 1/4 x 10 |
| Convection | No | Duct Type | Rectangular |
| | | Vent Fan Location | Side |
| | | CFM Motor Class | 400 |

Find a better fit for your kitchen with this small over-the-range microwave with vent that removes smoke, odor and moisture like a standard hood. Save space with a low profile design that fits in the same space as your undercabinet hood but can still cook all the essentials with 1.1 cubic feet of purposeful capacity and 900-watt cooking power.

- Top Features
- 400 CFM Motor Class High Performance Venting
- Low Profile Design
- 900-Watt Cooking Power

Manuals & Literature:

-  [Installation Guide](#)
-  [Use and Care Guide](#)
-  [Warranty Information](#)



Whirlpool® 5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

WFW560CHW

Available Finishes/Colours


WFW560CHW
White


| Dimensions | | Controls | |
|----------------------------|-----------------------------|---|--|
| Width | 27 | Stackable | Yes |
| Depth | 31 9/16 | Maytag Commercial Technology Components | No |
| Minimum Height | 38 5/8 | LED Color | Blue |
| Configuration and Overview | | Display Type | Cycle Indicator Lights with Digital Time Remaining |
| CEE Tier Rating | Tier I | Cycle and Options | |
| Energy Star® Qualified | ENERGY STAR® Qualified | Number of Spin Speeds | 4 |
| UL | UL | Number of Soil Levels | 3 |
| Controls | | Temperature Combinations | Hot, Cold, Cool, Warm |
| Out of Balance Sensing | Yes | Washer Option Selections | Control Lock, Extra Rinse |
| Hoses Included | 4ft 4in Drain Hose Included | Number of Wash Cycles | 37 |
| Basket Material | Stainless Steel | | |
| Motor Drive Type | Direct Drive | | |
| Pedestal Options | WFP2715HW, XHP1000XW | | |


Match your family's routines and your space with a closet-depth front load washing machine that still offers plenty of room for bulky items at 5.0 cu. ft. I.E.C. capacity. Let the ENERGY STAR® certified washer guide you to the right cycle combinations, like the Sanitize cycle with Oxi, or customize up to 35 of your own with Intuitive Controls.


- Top Features
- 5.0 cu. ft. I.E.C. Capacity
- ENERGY STAR® Certified
- Intuitive Controls

Manuals & Literature:

 [Use and Care](#)

 [Energy Guide](#)

 [Installation Instructions](#)

 [Warranty](#)



Whirlpool® 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

YWED5620HW

Available Finishes/Colours

YWED5620HW
White

| Dimensions | | Cycle and Options | |
|----------------------------|---------------------------|---|-------------|
| Height | 38 3/4 | EcoBoost™/Energy Saver | Yes |
| Width | 27 | Lint Filter Indicator | No |
| Depth | 31 | Maytag Commercial Technology Components | No |
| Configuration and Overview | | Dryer Option Selections | |
| Venting Direction | Left, Right, Bottom, Rear | Control Lock, Cycle Signal, Damp Dry Signal, Eco Boost™ | |
| Maximum Vent Length | 64 | Temperature Selections | |
| Fuel Type | Electric | High, Low, Medium, Air Only | |
| Capacity | 7.40 | Style and Extras | |
| Energy Star® Qualified | ENERGY STAR® Qualified | Drum Material | Powder Coat |
| Cycle and Options | | Drying Rack | No |
| Number of Dryer Cycles | 36 | Interior Light | No |
| Advanced Moisture Sensor | Yes | Pedestal Options | Yes |
| Cycle Time Remaining | Yes | | |

Let the front load electric dryer guide you to the right cycle combinations for whatever you're drying with Intuitive Controls. Advanced Moisture Sensing uses three moisture sensors to help prevent overdrying. The ENERGY STAR® certified electric dryer helps keep wrinkles from setting after the cycle with the Wrinkle Shield™ option.

Top Features


Advanced Moisture Sensing

Wrinkle Shield™ Option

7.4 cu. ft. Capacity

Manuals & Literature:

 [Use and Care](#)  [Installation Instructions](#)

 [Warranty](#)